

# ASIS SOLAS RESCUE 6.5 WITH SINGLE POINT LIFTING FRAME


Technical Specifications - Page 1/4



<b>DIMENSIONS</b>	
Overall length	6430 mm
Overall Beam	2490 mm
Internal Length	5620 mm
Internal Beam	1950 mm
Bouyancy Collar diameter	480 mm
Weight (fully equipped)	1247 Kg
Weight (fully manned)	1742 Kg

<b>CAPACITY</b>	
Max No. of Persons*	6 Persons
Floor Board Usable Area	5.7 m <sup>2</sup>
Bouyancy Volume	2341 L



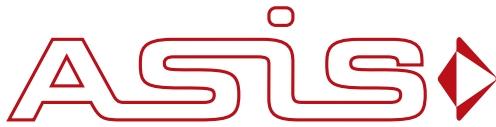

# ASIS SOLAS RESCUE 6.5 WITH SINGLE POINT LIFTING FRAME

Technical Specifications - Page 2/4

<b>SAFETY / INFLATION</b>	
Number of Air Chambers	5 No.
Inflation Pressure	0.24 bar / 3.4 PSI
Intercommunication / Inflation Valves	5 No.
Pressure Release Valves	5 No.
Approvals	EC (MED)


<b>ENGINE</b>	
Shaft Length (Single)	20" Standard
Power	1 x 90 HP
Propulsion	Single Yamaha 2 stroke 90 AETOL approved

<b>BOUYANCY TUBE</b>	
Fabrics	Hypalon Neoprene 1670 Dtex
Standard Colors	SOLAS Orange
Intercommunication and Inflation Valve	5 No.
Safety Valves	5 No.
Internal Chambers	5 No.
Round Rubbing Strake	Double Rubber Fender Strake all around the tube
Grab Rope	Straight Line Rope With Rubber Eyes X 2

<b>HULL &amp; DECK</b>	
Construction	MED certified fire retardant resin & gel coat reinforced Hull & Deck
Deck	Deck with built-in Non Skid Texture
Hull Drains	1 No.
Deck Self Drains	2 No.
Standard Fuel Tank	100 L
Bilge Pumps	2 No.
Cable Routing	Under Deck Cable Routing Channel

<b>TRANSOM</b>	
Pit Drain	2 No.
Transom Thickness	60 mm Standard



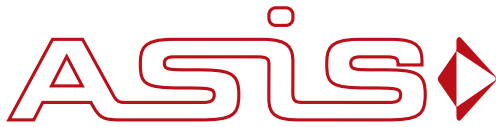


## ASIS SOLAS RESCUE 6.5 WITH SINGLE POINT LIFTING FRAME

Technical Specifications - Page 3/4

<b>TOWING &amp; HOISTING</b>	
Bow Towing Ring (S.S U Bolt) on Hull	1 No.
Transom Towing Ring (S.S Bolts)	2 No.
Lifting Arrangement	Singing Hoisting Frame with Quick Release Hook

<b>ACCESSORIES</b>	
Double Console	1 No.
Straddle Seats	4 No.
Bow Tow Post	1 No.
Double Skining (Top collar)	1 No.
Black powder coated Kell Guard	1 No.
Black powder coated A-Frame	1 No.
Self Righting System	1 No.
Search Light	1 No.
Black powder coated Tube Ladder	1 No.
Offshore compass	1 No.
Electric Torch	1 No.
Whistle	2 No.
First Aid Kit (for 25 people)	1 No.
Buyont Rescue Quoits + 30m line	1 No.
Radar Reflector	1 No.
Foot Pump	1 No.
Repair Kit	1 No.
Paddles	2 No.
Thermal Protective Aid	4 No.
Propeller Guard	1 No.
Fire Extinguisher	1 No.
Knife	4 No.
Buyont Safety Knife	1 No.
Sponge	1 No.
Life Jacket	6 No.
Manual Lamp (20 hrs)	1 No.
Long Torch	1 No.
Anchor + 30m Rope	1 No.
Mooring Rope	1 No.
Foldable Stretcher	1 No.
Boat Cover	1 No.
HIN plates, Builders Plate, MED identification number	1 No.
Export Package	1 No.



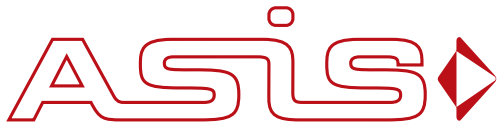

# ASIS SOLAS RESCUE 6.5 WITH SINGLE POINT LIFTING FRAME

Technical Specifications - Page 4/4

<b>TOWING &amp; HOISTING</b>
EC / MED (Wheelmark) by Germanischer Lloyd AG
On-Water Test Certificate
Owners Manual

